ROTEX BM&M



Rotex Group: Unmatched Product Quality and Product Yields

Rotex High Performance Screeners provide accurate separations for the plastics processing industry. Efficient removal of "longs" and "toothpicks" due to horizontal plane and long stroke motion which keeps elongated material lying flat on the screen. This keeps the "longs" and "toothpicks" from up-ending and passing with the good pellets as they tend to when exposed to a vibratory motion with a vertical component. Gyratory-reciprocating motion promotes effective material stratification so the finer material is exposed to the screen opening and falls to the fines fraction.

Benefits for Plastic Compounders:

- Consistent product quality to meet stringent specifications

 Are the blades of the pelletizer becoming dull? The Rotex screener rejects the "longs" and "triples"
- High product recovery

 Higher efficiency means better recovery of on-size pellets
- Models designed for compounding process conditions
 We understand quick screen change & clean out is needed when
 changing product campaigns. Single deck units with both oversize and
 fines removal available
- Maximum Uptime
 Aggressive blinding control to continue operation without shutting down to clear screen deck of troublesome off-size material
- Customized to fit your process requirements

Free Material Analysis

Over 100 years of proven correlation between lab test results and actual field performance:

- Experienced Lab Technicians and Application Engineers recommend machine size, settings and screen openings to ensure accurate, efficient separations
- Comprehensive separation analysis
- Summary report provides data to support ROI decisions

GYRATORY-RECIPROCATING MOTION

The Gyratory-Reciprocating motion gradually changes along the length of the deck to an elliptical path and finally to a straight line action at the discharge end.

Circular motion at the feed end

Spreads the material across the full width of the screen surface

Stratifies the material

Conveys material forward

Elliptical motion at the middle section

- Long-stroke elliptical action
- Enhances stratifi cation
- Conveys material at high capacity


Straight-line motion at the discharge end

- Linear sifting motion
- Removes near-size particles
- Improves screening efficiency
- No vertical component ensures material is in constant contact with the screen surface.

ath 1 2 2 3 is in



Plastic Pellet Screener

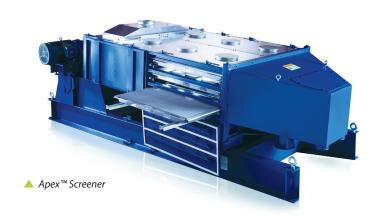

Engineered for a Wide Range of Capacities and Ergonomic Operation

- Customised for your layout and process conditions
- Ergonomic operation
- Long service life

The Motion that Provides the Performance

Rotex Motion means:

- Effective ball mesh cleaning system to control blinding for longer uptime
- Spreads material across the full width of the screen surface, eliminating the need for additional feeding equipment
- Effective near-size separations for the highest Accuracy and Efficiency



